



## R75 Regulator



### Features

- Compact Size Allows Greater Design Flexibility
- Connects to Other QUBE Units Using Just Screws and O-rings (Included)
- Integral Mounting Slots Eliminate Need for Mounting Brackets
- Diaphragm Operated Design with Balanced Poppet Design for Quick and Accurate Regulation
- Panel Mountable
- High Flow: 1/4" - 25 SCFM<sup>§</sup>  
3/8" - 45 SCFM<sup>§</sup>  
1/2" - 60 SCFM<sup>§</sup>

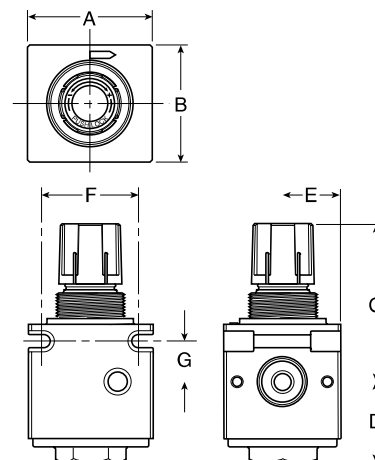

Port Size	NPT
	Relieving
<b>Without Gauge 0-125 PSIG Reduced Pressure</b>	
1/4"	<b>R75-02C</b>
3/8"	<b>R75-03C</b>
1/2"	<b>R75-04C</b>
<b>With Gauge 0-125 PSIG Reduced Pressure</b>	
1/4"	<b>R75-02CG</b>
3/8"	<b>R75-03CG</b>
1/2"	<b>R75-04CG</b>

R75 Regulator Dimensions						
A	B	C	D	E	F	G
2.19 (55.6)	2.06 (52.4)	2.75 (69.8)	1.38 (34.9)	1.09 (27.8)	1.66 (42.1)	0.69 (17.5)

Inches  
(mm)


NOTE: 1.25 Dia. (32mm) hole required for panel mounting.

**Bold Items are Most Popular.**

For other models refer to ordering information below.




§ SCFM = Standard Cubic Feet Per Minute at 100 PSIG Inlet, 75 PSIG No Flow Secondary Setting, and 20 PSIG Pressure Drop.

## Ordering Information

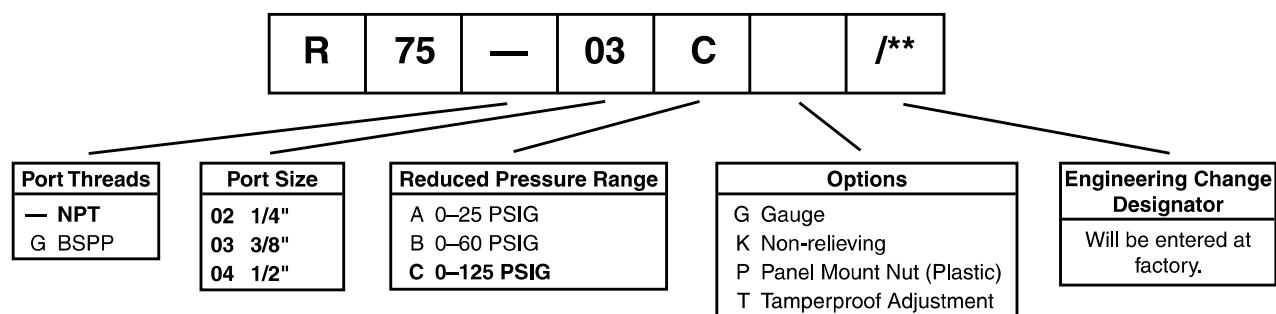

**BOLD ITEMS ARE MOST POPULAR.**

## Technical Information

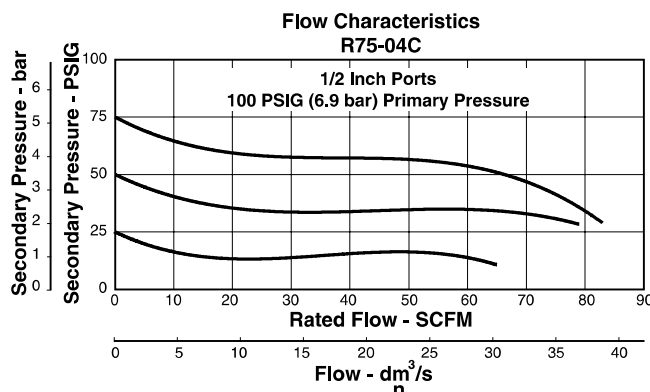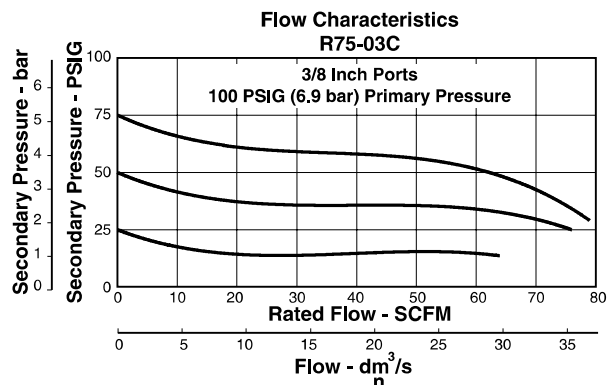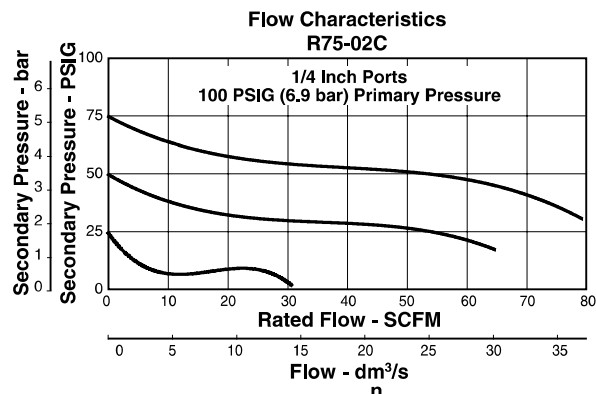

### **WARNING**

Product rupture can cause serious injury.  
Do not connect regulator to bottled gas.  
Do not exceed maximum primary pressure rating.

### **CAUTION:**

**REGULATOR PRESSURE ADJUSTMENT** – The working range of knob adjustment is designed to permit outlet pressures within their full range. Pressure adjustment beyond this range is also possible because the knob is not a limiting device. This is a common characteristic of most industrial regulators, and limiting devices may be obtained only by special design. For best performance, regulated pressure should always be set by increasing the pressure up to the desired setting.

## R75 Regulator Kits & Accessories

### Cage Kits–

Standard .....CKR75  
Tamperproof .....CKR75T

**Control Knob** ..... R35-0545P

### Gauges –

1-1/2" Dial Size, 1/8" Back Connection  
0 to 60 PSIG (0 to 4 bar) ..... K4515N18060  
1-1/2" Dial Size, 1/8" Back Connection  
0 to 160 PSIG (0 to 11 bar) ..... K4515N18160

**Panel Mounting Bracket Kit** ..... SA161X57

**Face Mounting Bracket Kit (See Page 37)** ..... SAR75Y57

### Panel Mount Nut –

Plastic .....R05X51-P  
Aluminum .....R05X51-A

### Repair Kits –

Non-Relieving Diaphragm, Valve Assembly ..... RKR75K  
Relieving Diaphragm, Valve Assembly ..... RKR75

## Specifications

Gauge Ports (2) ..... 1/8 Inch  
Port Threads ..... 1/4, 3/8 & 1/2 Inch  
Supply Pressure ..... 300 PSIG Max. (20.4 bar)  
Temperature Rating ..... 40°F to 125°F (4.4°C to 52°C)  
Weight ..... 1.35 lbs. (.61 kg) / unit  
27 lbs. (12.24 kg) / 20-unit Master Pack

## Materials of Construction

Adjusting Knob ..... Acetal  
Body ..... Zinc  
Bottom Plug ..... Glass-Filled Acetal  
Cage ..... Glass-Filled Acetal  
Elastomers ..... Buna-N