NV-1/4 MINI NEEDLE VALVE



Strong and Durable, Compact Size Needle Valve Pressures up to 6,000 psi soft seat, 10,000 psi hard seat

SPECIFICATIONS

"NV" **Series Number**

Material Carbon steel or 316 stainless steel

See chart below for component materials

Soft seat - 6000 psi at 200° F **Pressure Rating**

Hard seat - 10,000 psi at 200° F

Connection Size 1/4" NPT, male x female, female x female


male x male

Handle Tee

Seat Material Soft Seat - POM

Hard Seat - Integrated


Box Quantity 60 pieces Est. Unit Weight 0.40 lb/0.20 kg

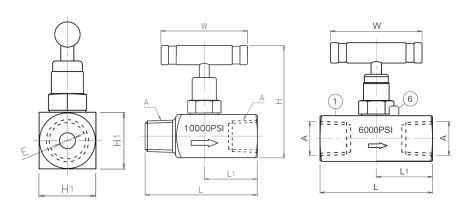

Part Number	Unit	Α	L	L1	Н	H1	E	W
NV-SS-1/4-GS-180-MXF NV-SS-1/4-GS-180-FXF NV-SS-1/4-HS-180-MXF NV-SS-1/4-HS-180-FXF NV-CS-1/4-GS-180-MXF NV-CS-1/4-GS-180-MXM NV-CS-1/4-GS-180-FXF NV-CS-1/4-HS-180-MXF NV-CS-1/4-HS-180-FXF	In.	1/4" NPT	2.28"	1.14"	2.48"	0.75"	0.17"	1.81"
	mm		58	29	63	19	4.2	46

All dimensions shown in the catalog are approximate and subject to change.





Number	Description	316 Valve	Carbon Steel Valve
1	Body	316 SS	C.S.
2	Bonnet	316 SS	C.S.
3	Stem	316 SS	304 SS
4	Handle	303 SS	C.S.
5	Fixing Screw	302 SS	C.S.
6	Lock Pin	303 SS	C.S.
7	O-Ring	Viton®	Viton®
8	Back-up Ring	PTFE	PTFE
9	Dust Cap	NBR	NBR

AVAILABLE OPTIONS*

- High Temperature
- Thumb Wheel Handle
- Panel Mount
- Bleed Screw
- Tube End Connection
- Alternate Connection Sizes

^{*}Lead times/minimums may apply